


EASTERN[®] Centrichem[™]

Centrifugal pumps for dependable
service in the process industries.

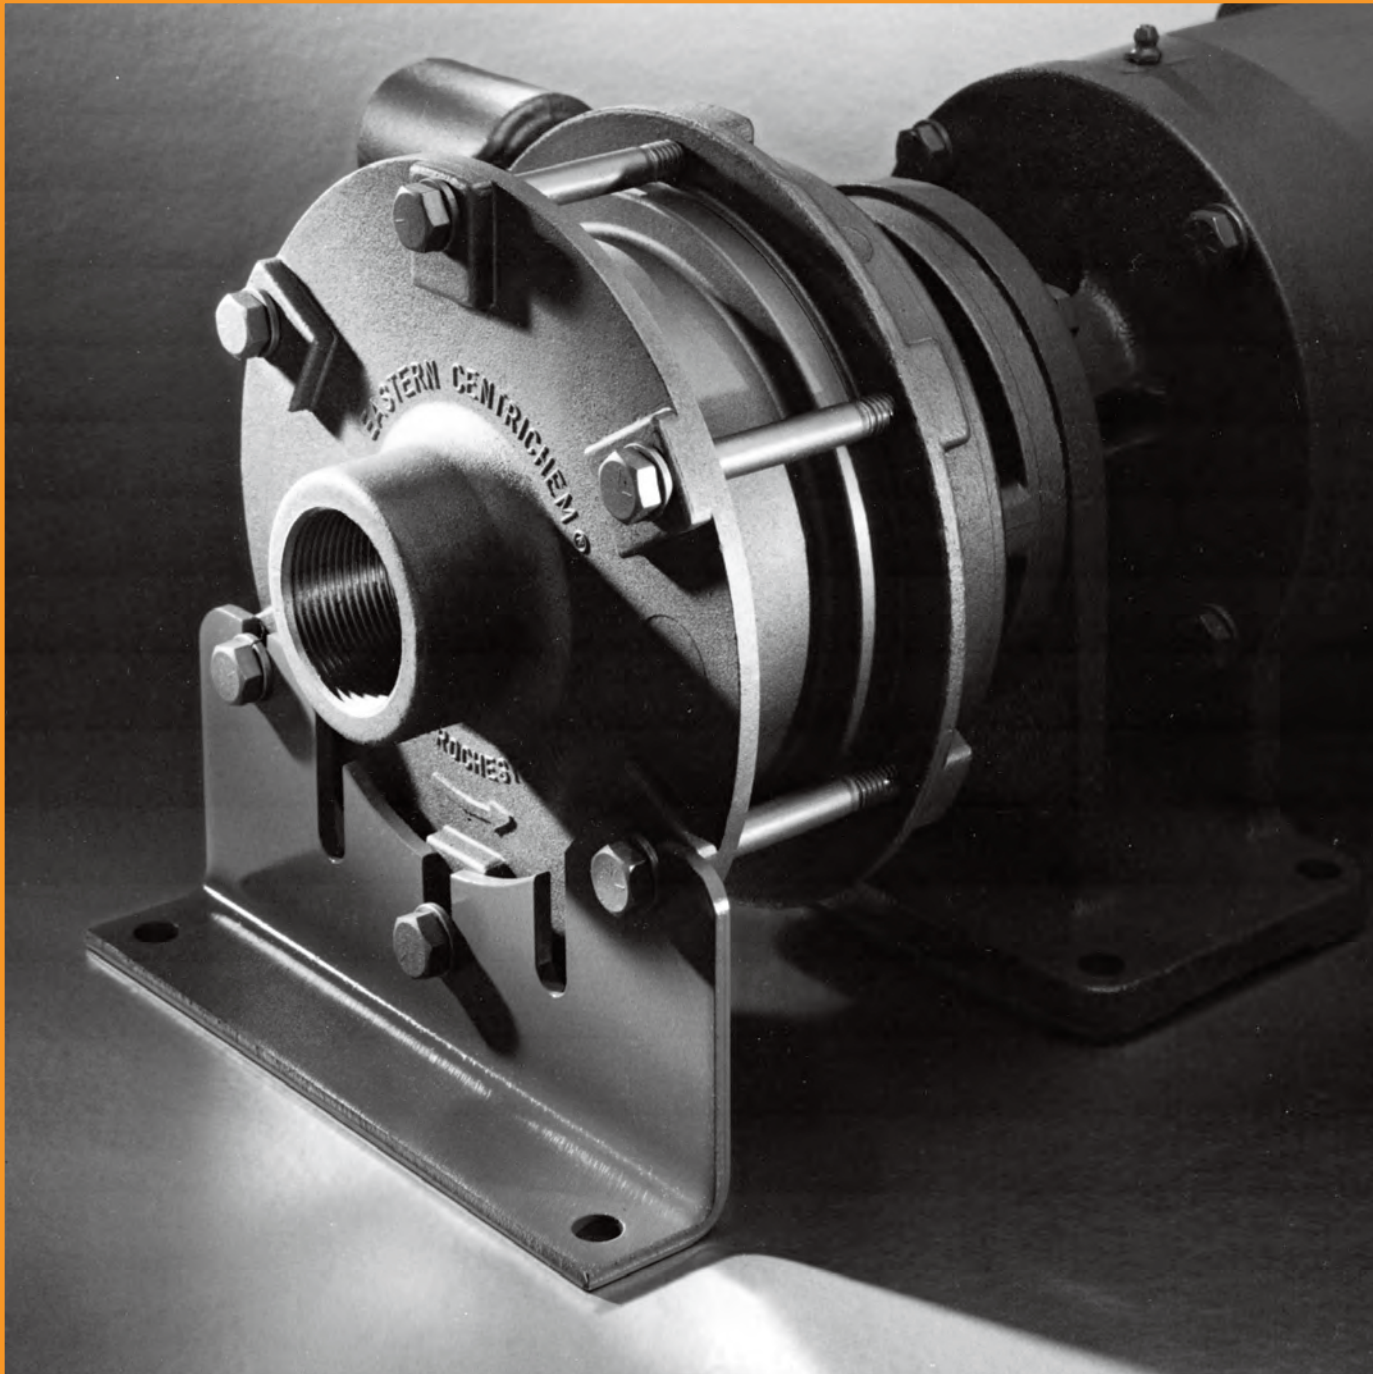

PULSAFEEDER[®]

Eastern® Centrichem™ pumps are built to last.

Eastern® Centrichem™ single-stage and multi-stage centrifugal pumps are designed for a wide variety of process industry applications, pilot plant operations, and laboratory uses.

And, just as important, they are designed for long, dependable service.

Construction: Each Centrichem™ pump is close coupled for greater strength, and comes ready to mount directly to NEMA 56C or 143/5TC or 182/4C motors. Consult factory for IEC motor frames. This design eliminates the need for special base-plate mountings, couplings, or complicated drives.

Pump chambers, rear housings, covers and impellers are all precision castings to ensure that pump walls are smooth. This avoids crevices which can lead to product contamination.

Precision castings also reduce flow resistance to a minimum. This improves their hydraulic efficiencies to a level unmatched in pumps of this size.

Generous clearance and the over-hung shaft design of the single-stage pumps enable them to handle corrosive liquids

that contain low percentages of solids.

And their mechanical rotary seals make these pumps suitable for extensive applications with acids, alkalis, and solvents.

Motors: The standard motors for Eastern® Centrichem™ pumps can be either single or three phase, 115/230 or 230/460 volt, 60 Hertz, TEFC motors. We can furnish motors with other electrical characteristics, or enclosures, as needed.

For general purpose applications or with excessive amounts of dust, dirt, or similar foreign materials that might harm the motor, we'll provide totally enclosed motors.

For hazardous applications involving flammable liquids or vapors we recommend explosion proof motors (approved by Underwriters Laboratories for Class 1 or 2 hazardous locations) equipped with explosion proof junction boxes. Continuous duty motors come standard on our industrial model pumps.


Air motors are also available.

Materials: Eastern® Centrichem™ pumps are available in 316 stainless steel and Alloy C. These materials are suitable for a wide variety of acid and alkali solutions. Please consult our Chemical Resistance Chart for proper selection of metallurgy and shaft seal combinations.

Operating limits: Eastern® models D&J pumps are rated at temperatures up to 250°F, models C&H can go to 450°F, and viscosities up to 100 centipoises.

Dimensions: This brochure provides dimensional data for pumps with adaptors only. Certified dimension prints for specific pump and motor combinations will be furnished upon request, as motor dimensions vary by manufacturer.

Engineering: Eastern® will modify or adapt our pumps to meet severe or unusual service conditions. Also, we can manufacture specialized pumps to meet specific application requirements. Contact your local Eastern distributor for assistance in determining what, if any—modifications you need.

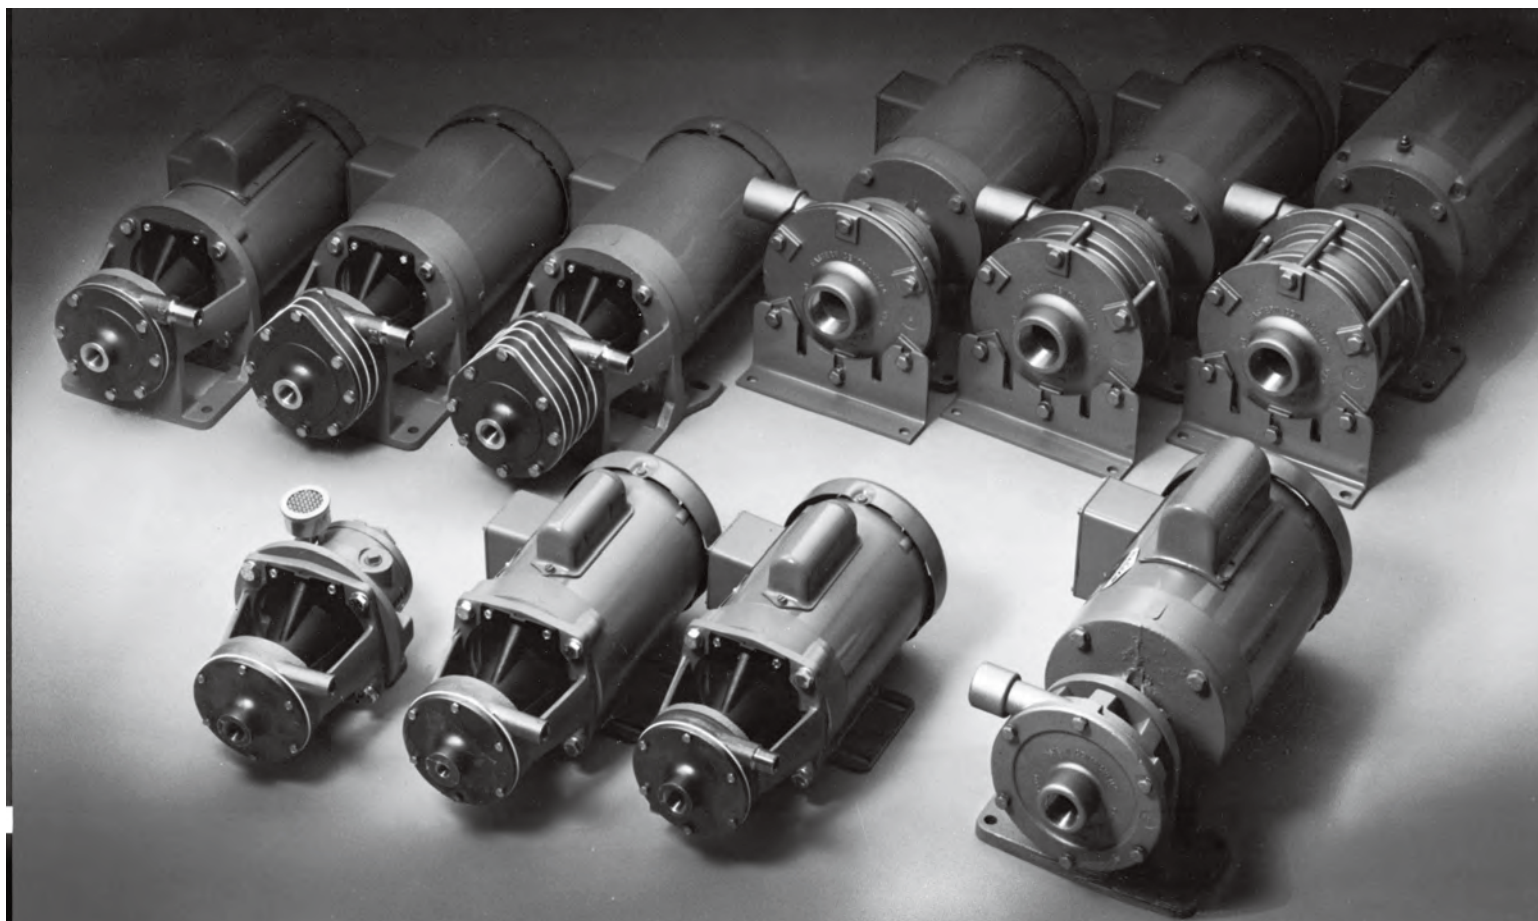

Eastern® Centrichem™ pumps offer the features you need.

Eastern® Centrichem™ pumps are available in twelve models. Each model is specifically designed for continuous duty transfer or circulating operation service within the process industries.

Eastern® Centrichem™ pumps use state-of-the-art seals. Eastern® Centrichem™ pumps utilize mechanical seals exclusively on all models. Mechanical seals are the preferred sealing method in most applications, and offer many advantages over conventional packed stuffing boxes.

- reduced friction and power loss
- zero leakage of product
- elimination of shaft wear

A wide variety of seal configurations provide the best selection of elastomers and mating faces in order to handle a

wide range of corrosive liquids. To make sure you select the right seal, careful consideration must be given to the service and operating conditions of each specific application.

Type 21® and Type 9® seals cover the widest range of services. These seals are dimensionally interchangeable. They operate in the same manner, using spring tension to keep their stationary and rotating faces in contact.

Primary sealing is accomplished by interaction of the lapped stationary and rotating faces. Secondary sealing occurs at the shaft by means of a tight fitting bellows in the Type 21® design, or a PTFE wedge in the Type 9® arrangement. The final sealing point occurs at the static seat by means of either an elastomeric O-ring,


or a PTFE seat ring.

The Type 9® seal is designed for demanding applications. Its head is fixed to the shaft by anti-rotation pins or set screws, and utilizes a PTFE wedge between the seal ring and shaft. This wedge improves sealing and extends compatibility with most chemicals. All metal components of the seal are either 316 ss or Alloy C. The rotary face is chemical grade carbon or PTFE and the seat is silicon carbide. The Type 9® seal is available in double configuration for more demanding or hazardous applications.

The Type 21® seal is the more economical of the two. It uses an elastomeric bellows to hold it to the shaft and prevent leakage along the pump shaft, and spring tension to maintain proper compression on the seal faces. Chemical compatibility is extensive, as governed by the Viton® elastomer. All metal components of the seal are 316 stainless steel, with a carbon rotary and ceramic seat.

We do not recommend the use of either of these seals with inherently abrasive materials. However, these seals will handle most liquids over an extremely wide range of temperatures (from -10°F to +250°F for a Type 21® seal and from -10°F to +450°F for a Type 9® seal) and pressures (from 25 inches of mercury vacuum to 150 psig for a Type 21® seal and 250 psig for a Type 9® seal).

NOTE: The specific gravity of a liquid affects successful seal operations. Therefore, any liquid whose specific gravity is less than 0.63 should be considered exceptional. In these cases please consult our Sales Engineering Department.

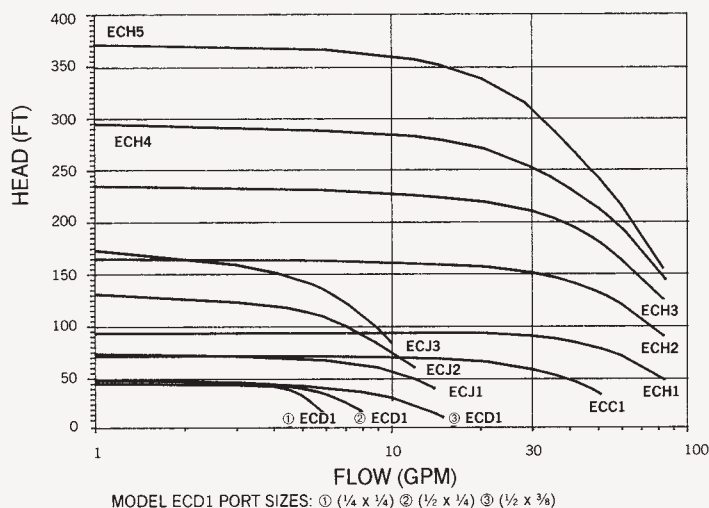


Composite performance
Use this graph to select an Eastern® Centrichem™ pump. Refer to pages 4 through 8 for individual, detailed performance curves of each pump.

General specifications Use this chart in conjunction with the individual performance curves on the following pages. Note: keep this page folded out for easy reference.

Model	Size	Maximum Capacity	TDH (shut off head)	Basic Materials Available*	Mechanical Seals (internal)
ECD1	1/4" suction 1/4" discharge	6.5 gpm	46 ft	316 ss	single
ECD1	1/2" suction 1/4" discharge	9.0 gpm	50 ft	316 ss	single
ECD1	1/2" suction 3/8" discharge	20.0 gpm	50 ft	316 ss	single
ECJ1	1/2" suction 1/2" discharge	20.0 gpm	75 ft	316 ss	single double
ECJ2	1/2" suction 1/2" discharge	16.0 gpm	130 ft	316 ss	single double
ECJ3	1/2" suction 1/2" discharge	15.0 gpm	175 ft	316 ss	single double
ECC1	1" suction 3/4" discharge	54.0 gpm	72 ft	316 ss Alloy C	single double
ECH1	1 1/2" suction 1" discharge	94.0 gpm	93 ft	316 ss Alloy C	single double
ECH2	1 1/2" suction 1" discharge	94.0 gpm	165 ft	316 ss Alloy C	single double
ECH3	1 1/2" suction 1" discharge	94.0 gpm	235 ft	316 ss Alloy C	single double
ECH4	1 1/2" suction 1" discharge	94.0 gpm	297 ft	316 ss Alloy C	single double
ECH5	1 1/2" suction 1" discharge	94.0 gpm	365 ft	316 ss Alloy C	single double



* All models are available pickled-and-passivated.

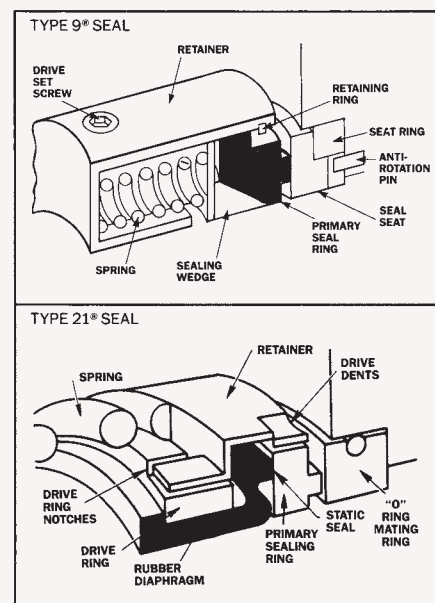

Type 21® and Type 9® are registered trademarks of John Crane International. Teflon® and Viton® are registered trademarks of DuPont.

Single-stage pumps.

ECJ1

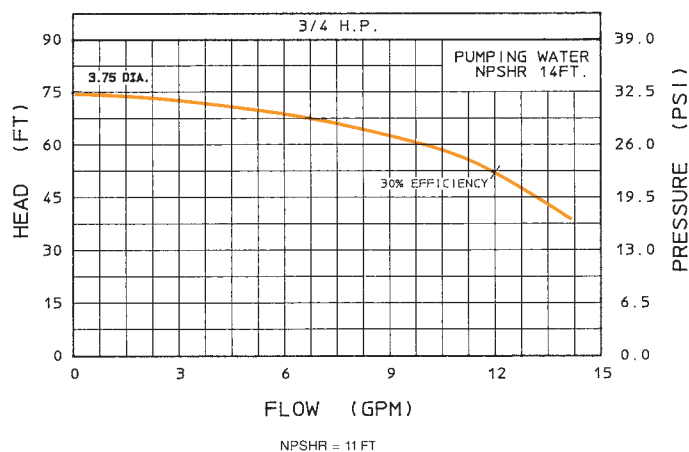
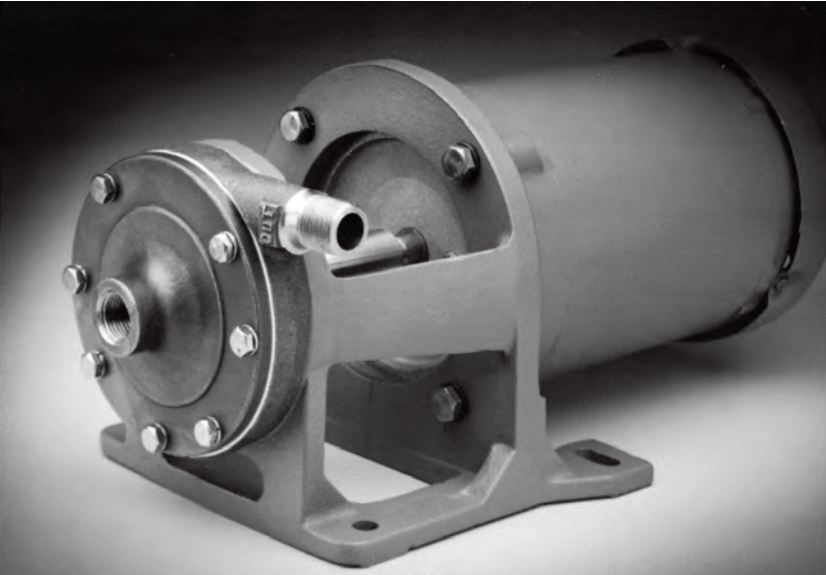


Applications: For continuous-duty industrial transfer, OEM equipment, pilot plant operations, or laboratory use where high purity or corrosive service is needed.

Design: End suction with an open impeller close-coupled to mount to any standard 56C motor. Consult factory for metric motor adapters.

Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on the single or double configurations. Type 9® single seals with chemical-grade carbon, PTFE and silicon carbide are optional.


ECH1

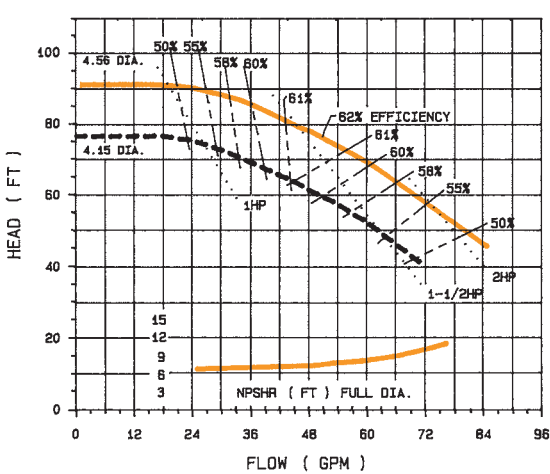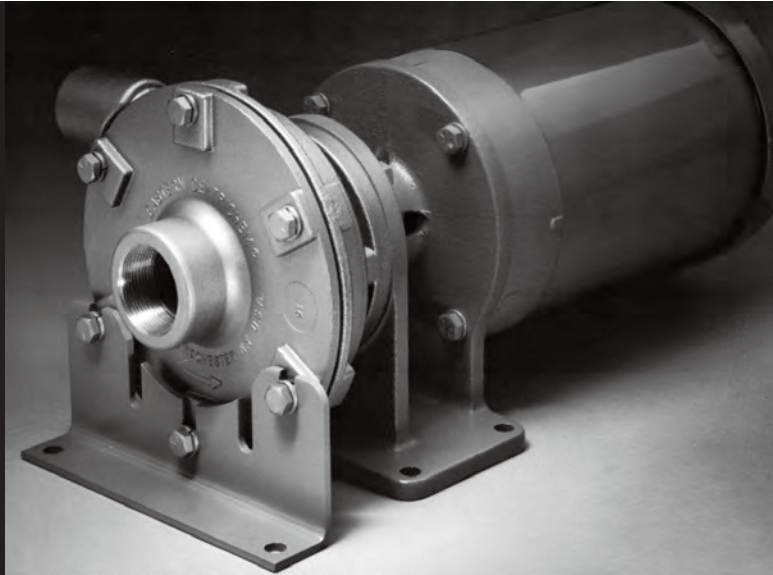


Applications: For continuous heavy-duty industrial transfer or process service where corrosion resistance is needed.

Design: High-efficiency, low-NPSHR end suction with a closed impeller close-coupled to mount to any standard 56C motor. PTFE O-ring seals. Impeller and housing are precision cast for high strength, chemical resistance, and a smooth internal finish. This results in quiet operation and a non-pulsating fluid flow. Consult factory for metric motor adapters.

Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on all 316 stainless steel pump models. Type 9® seals with chemical-grade carbon, PTFE and silicon carbide are optional on 316 stainless steel models and standard on Alloy C models. Double Type 9® seals are available in the same materials.

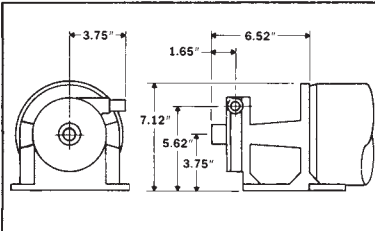

General specifications									
Model	Alloy	Inlet	Outlet	Best Eff. Point (BEP)	Max. Flow (GPM)	Shut-off Head (FT)	HP Range	Speed (RPM)	Weight (Pump & Adaptor)
ECJ1	316 ss	1/2" FNPT	1/2" MNPT	12 GPM at 52 ft	20	75	3/4	3450	17 lbs
ECH1	316 ss and Alloy C	1 1/2" FNPT or Flgd	1" FNPT or Flgd	51 GPM at 78 ft	94	93	1 to 2	3450	35 lbs


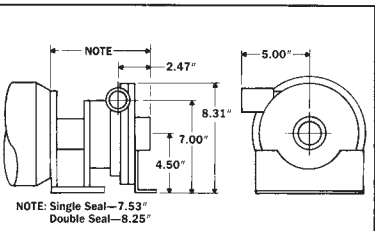


Motor dimensions vary by manufacturer—consult manufacturer's drawing for specifics.

Multi-stage pumps

The graphs on the following pages depict the performance ranges for our multi-stage pumps, based on clean water at 60°F with flooded suction and 3450 RPM motor operating speeds. You'll find graphs for our single-stage pumps on pages 4 and 5. Minimum recommended continuous flow is calculated as 10% of the Best Efficiency Point (BEP) flow.

ECJ2

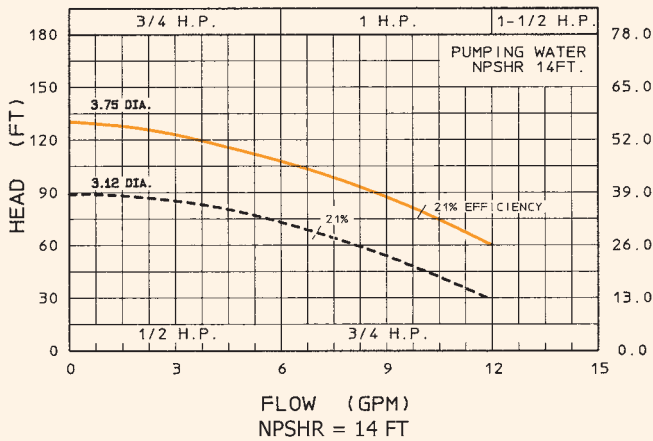
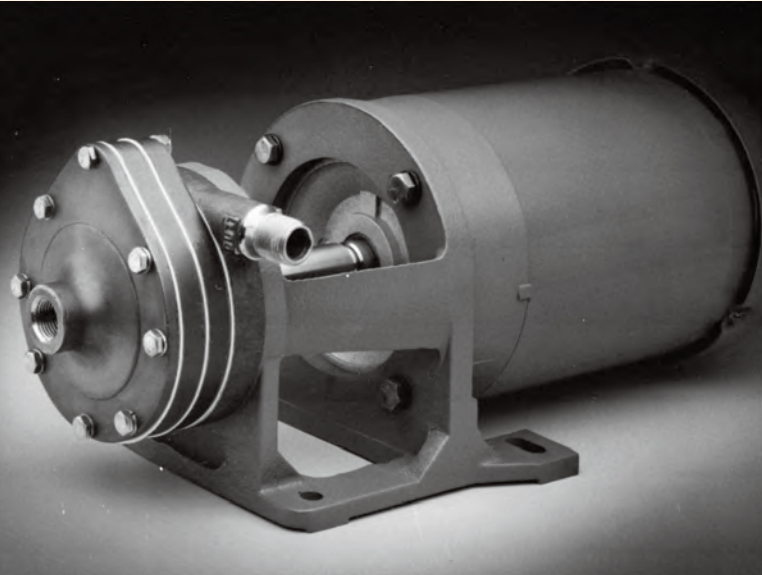


Applications: Continuous-duty, high-pressure pumps are used where positive displacement pumps are normally required, but where liquids containing small particles or solids preclude the use of close tolerance units. For transfer, OEM equipment, pilot plant operations, or laboratory use where high purity or corrosive service is needed.

Design: End suction with an open impeller close-coupled to mount to any standard 56C motor. Consult factory for metric motor adapters.

Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on the single or double configurations. Type 9® single seals with chemical-grade carbon, PTFE and silicon carbide are optional.


ECH2

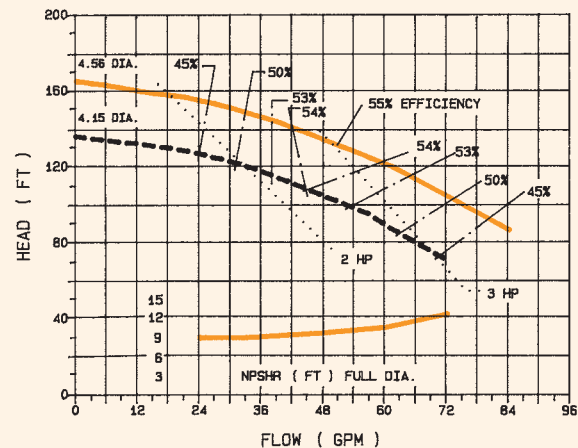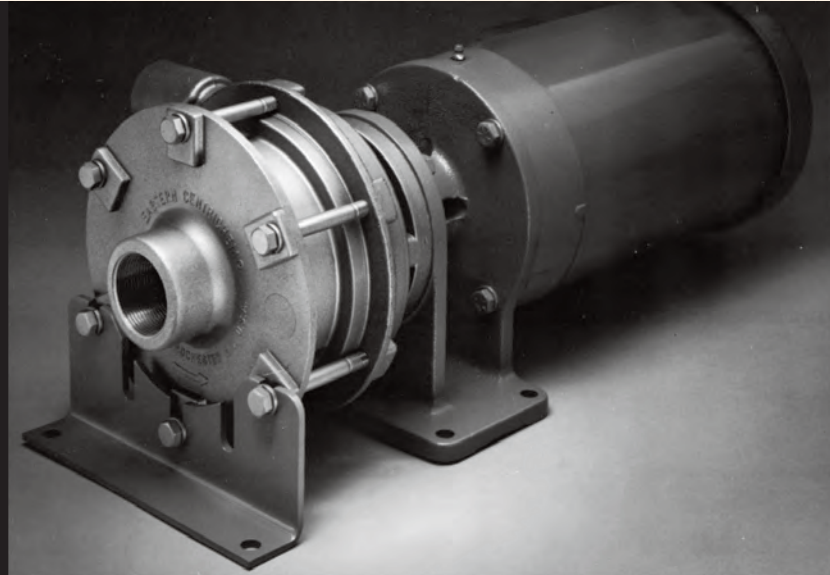

Applications: For continuous heavy-duty industrial transfer or process service where corrosion resistance is needed.


Design: High-efficiency, low-NPSHR end suction with a closed impeller close-coupled to mount to any standard 143/5TC or 182/4C motor. PTFE O-ring seals. These heavy-duty units handle high volumes at high pressures under severe operating conditions. Impellers and stages are precision cast for high strength, chemical resistance, and a smooth internal finish. This results in quiet operation and a non-pulsating fluid flow. Consult factory for metric motor adapters.

Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on all 316 stainless steel pump models. Type 9® seals with chemical-grade carbon, PTFE and silicon carbide are optional on 316 stainless steel models and standard on Alloy C models. Double Type 9® seals are available in the same materials.

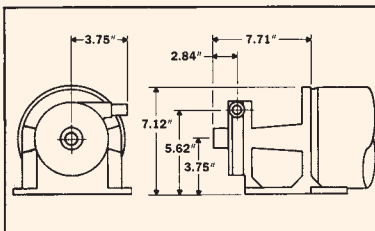

General specifications



Model	Alloy	Inlet	Outlet	Best Eff. Point (BEP)	Max. Flow (GPM)	Shut-off Head (FT)	HP Range	Speed (RPM)	Weight (Pump & Adaptor)
ECJ2	316 ss	1/2" FNPT	1/2" MNPT	10 GPM at 79 ft	16	130	3/4 to 1 1/2	3450	21 lbs
ECH2	316 ss and Alloy C	1 1/2" FNPT or Flgd	1" FNPT or Flgd	51 GPM at 132 ft	94	165	2 to 5	3450	44 lbs

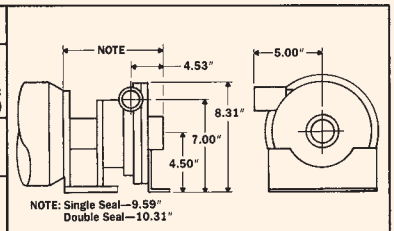

Motor dimensions vary by manufacturer—consult manufacturer's drawing for specifics.

Multi-stage pumps.

ECJ3

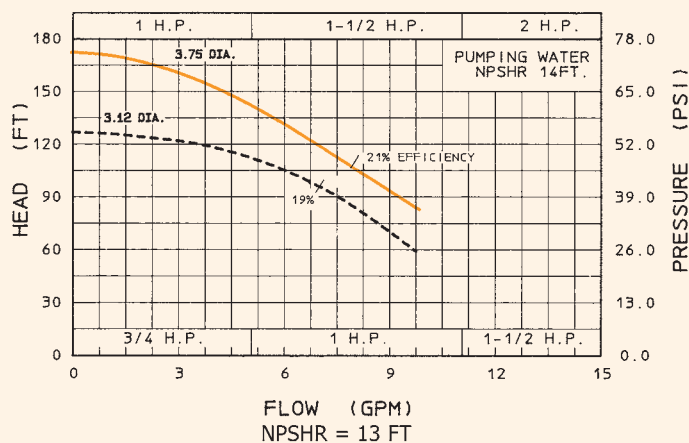
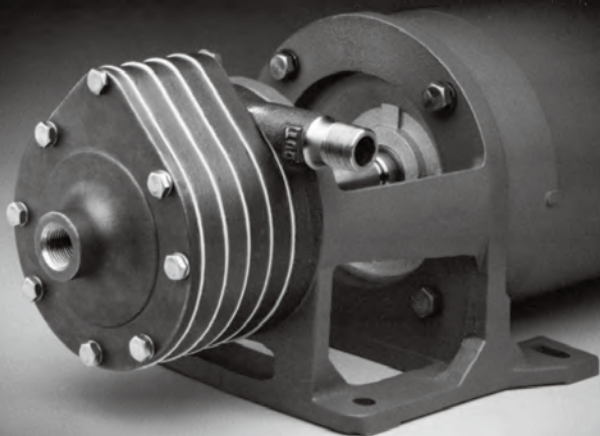


Applications: Continuous-duty, high-pressure pumps are used where positive displacement pumps are normally required, but where liquids containing small particles or solids preclude the use of close tolerance units. For transfer, OEM equipment, pilot plant operations, or laboratory use where high purity or corrosive service is needed.

Design: End suction with an open impeller close-coupled to mount to any standard 56C motor. Consult factory for metric motor adapters.

Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on the single or double configurations. Type 9® single seals with chemical-grade carbon, PTFE and silicon carbide are optional.


ECH3

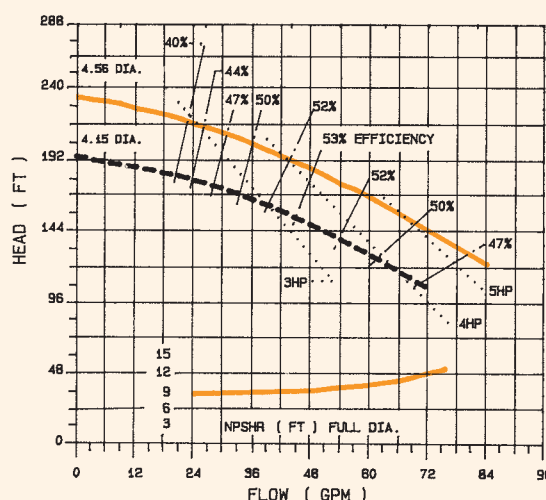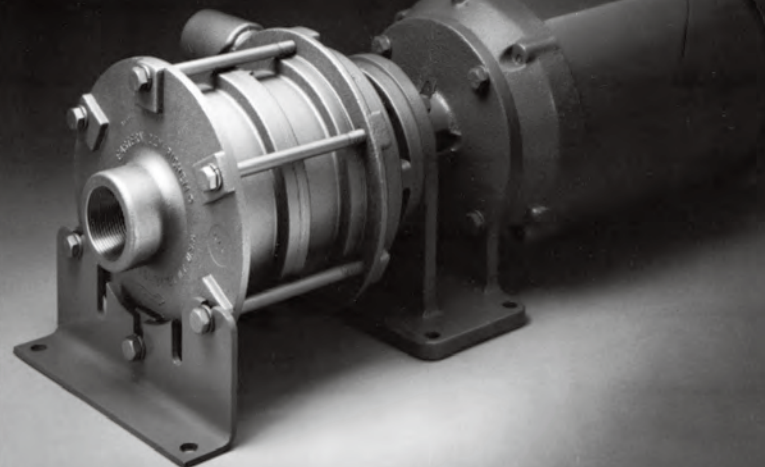

Applications: For continuous heavy-duty industrial transfer or process service where corrosion resistance is needed.


Design: High-efficiency, low-NPSHR end suction with a closed impeller close-coupled to mount to any standard 143/5TC or 182/4C motor. PTFE O-ring seals. These heavy-duty units handle high volumes at high pressures under severe operating conditions. Impellers and stages are precision cast for high strength, chemical resistance, and a smooth internal finish. This results in quiet operation and a non-pulsating fluid flow. Consult factory for metric motor adapters.

Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on all 316 stainless steel pump models. Type 9® seals with chemical-grade carbon, PTFE and silicon carbide are optional on 316 stainless steel models and standard on Alloy C models. Double Type 9® seals are available in the same materials.

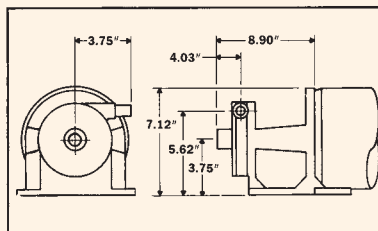

General specifications

Model	Alloy	Inlet	Outlet	Best Eff. Point (BEP)	Max. Flow (GPM)	Shut-off Head (FT)	HP Range	Speed (RPM)	Weight (Pump & Adaptor)
ECJ3	316 ss	1/2" FNPT	1/2" MNPT	8 GPM at 110 ft	15	175	1 to 2	3450	25 lbs
ECH3	316 ss and Alloy C	1 1/2" FNPT or Flgd	1" FNPT or Flgd	48 GPM at 185 ft	94	235	3 to 5*	3450	53 lbs

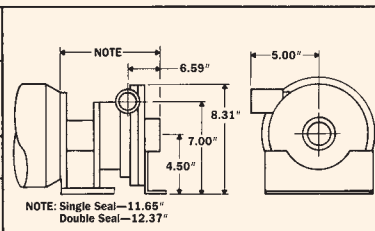


Motor dimensions vary by manufacturer—consult manufacturer's drawing for specifics.



*Requires throttling to 70 GPM.

Multi-stage pumps.

ECH4

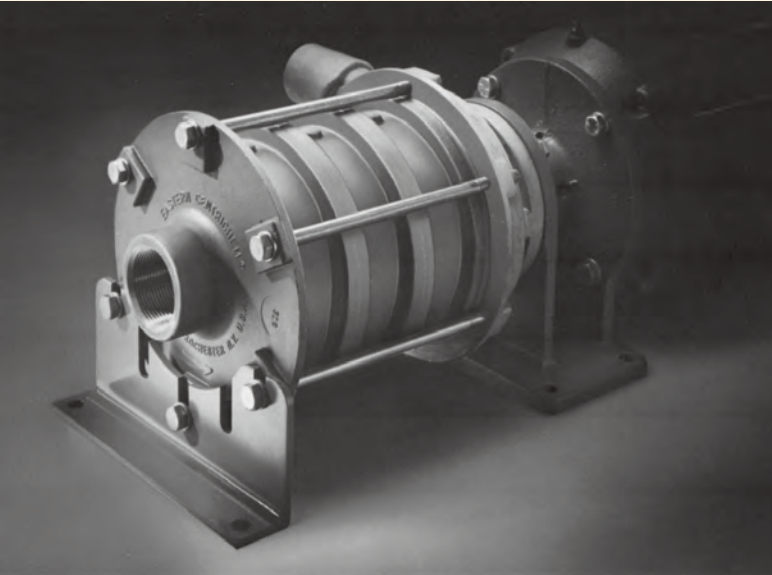


ECH5

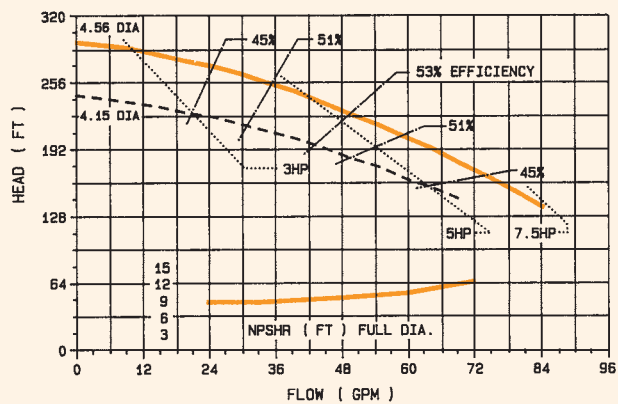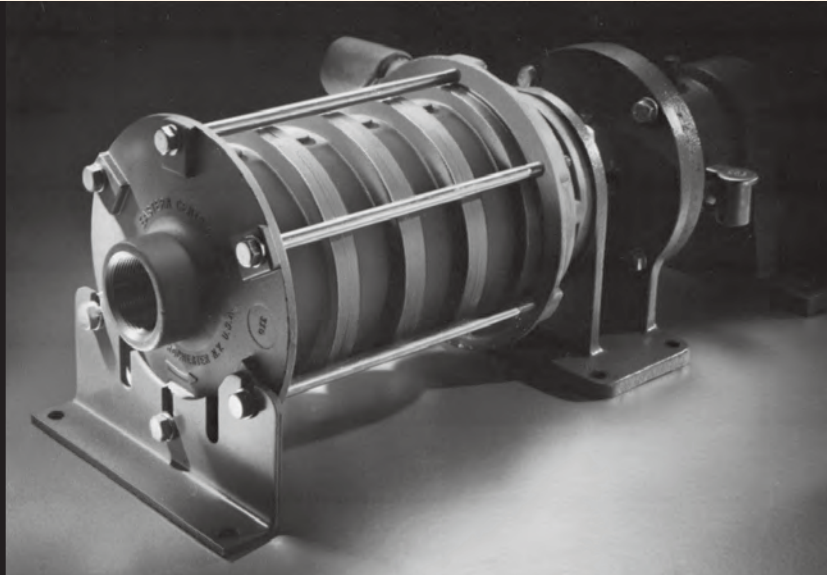

Applications: For continuous heavy-duty chemical transfer or process service where high head and corrosion resistance are required.

Design: High-efficiency, low-NPSHR end suction with a closed impeller close-coupled to mount to any standard 143/5TC or 182/4C motor. Pump is also available power frame mounted. PTFE O-ring seals. These heavy-duty units handle flows to 94 GPM at high pressures under severe operating conditions. Impellers and stages are precision cast for high strength and chemical resistance. Maximum standardization of parts minimizes and simplifies maintenance. Consult factory for metric motor adapters.


Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on all 316 stainless steel pump models. Type 9® seals with chemical-grade carbon, PTFE and silicon carbide are optional on 316 stainless steel models and standard on Alloy C models. Double Type 9® seals are available in the same materials.

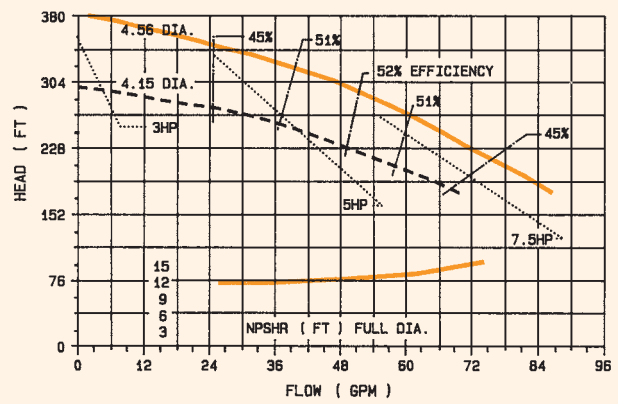

Applications: The Eastern® Centrichem™ 5H Model is rated to 94 GPM with a shut off head of 365 ft., for continuous heavy-duty chemical transfer or process service.


Design: High-efficiency, low-NPSHR end suction with a closed impeller close-coupled to mount to any standard 143/5TC or 182/4C motor. Pump is also available power frame mounted. PTFE O-ring seals. These heavy-duty units handle high volumes at high pressures under severe operating conditions. Impellers and stages are precision cast for high strength and chemical resistance. Maximum standardization of parts minimizes and simplifies maintenance. Consult factory for metric motor adapters.

Seal: Type 21® mechanical rotary seals with carbon, Viton® and ceramic are standard on all 316 stainless steel pump models. Type 9® seals with chemical-grade carbon, PTFE and silicon carbide are optional on 316 stainless steel models and standard on Alloy C models. Double Type 9® seals are available in the same materials.

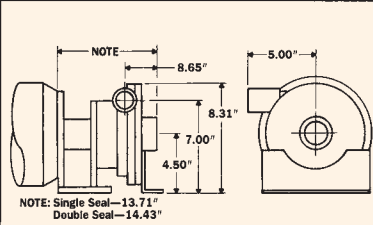

General specifications

Model	Alloy	Inlet	Outlet	Best Eff. Point (BEP)	Max. Flow (GPM)	Shut-off Head (FT)	HP Range	Speed (RPM)	Weight (Pump & Adaptor)
ECH4	316 ss and Alloy C	1½" FNPT or Flgd	1" FNPT or Flgd	51 GPM at 225 ft	94	297	5 to 10	3450	62 lbs
ECH5	316 ss and Alloy C	1½" FNPT or Flgd	1" FNPT or Flgd	51 GPM at 273 ft	94	365	5 to 10	3450	71 lbs

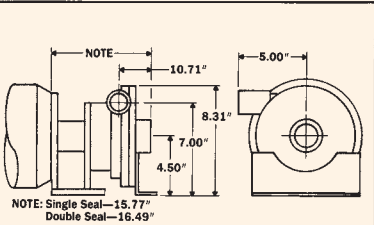

Motor dimensions vary by manufacturer—consult manufacturer's drawing for specifics.


How to select the right pump identification number.

All Eastern pump identification plates include the basic model number. These numbers fully describe the pump and seal specifications necessary for the future identification of your pump, and the replacement of parts or equipment, as needed.



Look at the sample model number (below) to see what information these numbers contain.

NOTE: Be sure to provide complete nameplate data when you order spare parts or replacement-pump motor assemblies.

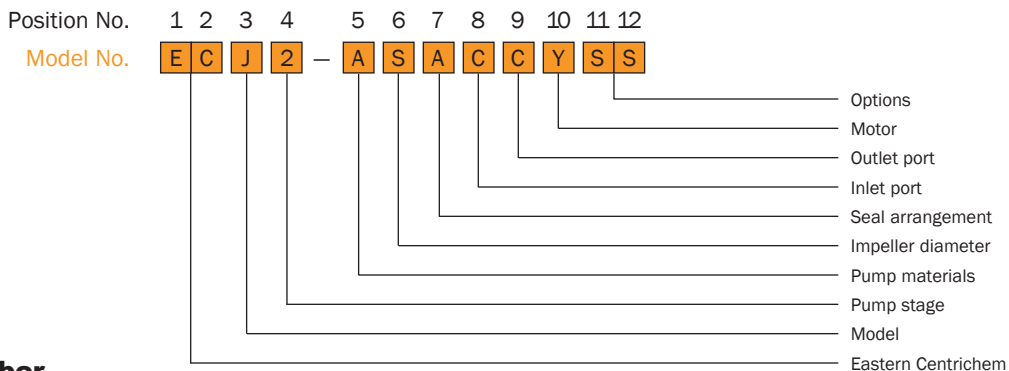

Pump identification number selection table

Position No. 1 & 2	EC = Eastern Centrichem Centrifugal Pump			
Position No. 3	Model	Standard Impeller Diameter		
	C	3.88"		
	D	3.25"		
	H	4.56"		
	J	3.75"		
Position No. 4	Pump Stage	Model		
	1 = Single Stage	C	D	H
	2 = Two Stage	.	.	.
	3 = Three Stage	.	.	.
	4 = Four Stage	.	.	.
	5 = Five Stage	.	.	.
Position No. 5	Available Pump Materials	.	.	.
	A = 316SS	.	.	.
Position No. 6	Impeller Diameter	.	.	.
	S = Standard Impeller	.	.	.
	A = 3.44"	.	.	.
	B = 3.06"	.	.	.
	C = 4.15"	.	.	.
	F = 3.12" (J2 & J3 Only)	.	.	.
Position No. 7	Seal Arrangements (See Note 4)	.	.	.
	A = 316SS Single 21 Seal	.	.	.
	CBN Rotary, Ceramic Seat, VTN	See Note 1	.	See Note 1
	P = 316SS Single 21 Seal	.	.	.
	P90 Rotary, Silicon CBD Seat, EPR	See Note 1	.	See Note 1
	C = 316SS Double 21 Seal	.	.	.
	(2 Single 21 Seals)	.	.	.
	CBN Rotary, Silicon CBD Seat, VTN	.	.	.
	K = 316SS Single 9 Seal	.	.	.
	CBN Rotary, Silicon CBD Seat, TFE	.	.	.
	T = 316SS Single 9 Seal	.	.	.
	FTF Rotary, Silicon CBD Seat, TFE	.	.	.
	E = 316SS Double 9 Seal	.	.	.
	CBN Rotary, Silicon CBD Seat, TFE	.	.	.
	B = Alloy C Single 9 Seal	.	.	.
	CBN Rotary, Silicon CBD Seat, TFE ¹	.	.	.
	R = Alloy C Single 9 Seal	.	.	.
	FTF Rotary, Silicon CBD Seat, TFE Seal	.	.	.
	F = Alloy C Double 9	.	.	.
	CBN Rotary, Silicon CBD Seat, TFE	.	.	.
Position No. 8	Inlet Port	.	.	.
	A = 1/4" FNPT	.	.	.
	C = 1/2" FNPT	.	.	.
	E = 1" FNPT	.	.	.
	F = 1 1/2" FNPT	.	.	.
Position No. 9	Outlet Port	.	.	.
	A = 1/4" FNPT	.	.	.
	C = 1/2" MNPT	.	.	.
	D = 3/4" FNPT	.	.	.
	E = 1" FNPT	.	.	.
	G = 3/8" MNPT	.	.	.
Position No. 10	Motor (See Note 3)	.	.	.
	Y = Pump and Motor	.	.	.
	N = Pump Wet End Only	.	.	.
Position No. 11 & 12	Options	.	.	.
	SS = No Options	.	.	.
	AX = Vents and Drains	.	.	.
	BX = Seal Flushing Port(s) (Note 2)	.	.	.
	CX = Vents, Drains and Seal Flushing Port(s)	.	.	.

Note 1:
316SS Single Type 21 Seal is not available for C & H Series pumps in Alloy C construction (Pump material option C).

Note 2:
Seal flushing ports are standard for all pumps with double seals and Model H pumps with single Type 9 Seals.

Note 3:
Power frame or 5 HP motor option is required when selecting H4 or H5 models.

Note 4:
Max. discharge pressure for Type 21 seals is 200 psig.

Eastern® Express
Delivers the pumps
you need when you
need them.

Our new Regional Stocking and Service Distributors are ready to deliver now. They'll give you prompt, technical service with "off the shelf" solutions to your pumping needs.

Call your local Eastern® distributor today for the pumps, parts, and service you need.



Manufacturers of Quality Pumps, Controls and Systems

ISO 9001 Certified

2883 Brighton-Henrietta Town Line Road
Rochester, New York 14623
(585) 292-8000
Telefax (585) 424-5619
<http://www.pulsafeeder.com>

